



MOULDING MATERIAL : FORPRENE 6NS901A65
PHISICAL MECHANICAL PROPERTIES

PROPERTIES	METHOD	UNIT	VALUE
HARDNESS 15"	ASTM D 2240	Shore A	65
DENSITY	ASTM D 792	g/cm ³	0.92
TENSILE STRENGTH	ASTM D 412-C	MPa	4.9
ELONGAT. at BREAK	ASTM D 412-C	%	150
MODULUS 100%	ASTM D 412-C	MPa	2.0
TEAR STRENGTH	ASTM D 624-C	N/mm	25
COMPRESSION SET (22 h 70 C.)	ASTM D 395-B	%	38

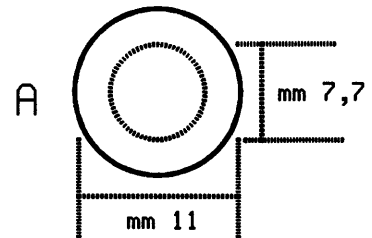

TEMPERATURE PERFORMANCE : 170 C. Max for 30 Minutes
155 C. Operating

				CLASSIFICAZIONE DELLE CARATTERISTICHE								
				<input type="checkbox"/> CRITICA <input checked="" type="checkbox"/> IMPORTANTE								
				TOLLERANZE GENERALI UNI ISO 2768-MK								
Nr	MODIFICHE	DATA	FIRMA	DENOMINAZIONE	SCALA							
	DISEGNATO		APPROVATO	ELECTRODE CAP								
30-09-04		01-10-04										
ADRIA CAB Srl				CODICE								
CONEGLIANO ITALY				SF0021								
				INDICE DI MODIFICA								
				<table border="1"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> <td>7</td> </tr> </table>		1	2	3	4	5	6	7
1	2	3	4	5	6	7						