


WIRE TYPE :	Supressed Silicone Ignition Cable Black- 4 mm dia.
CONSTRUCTION :	Conductor – Supressed resistite carbon core with conductive silicone rubber sheath Insulation – Hight temperature silicone rubber insulation
DIMENSION :	Conductor – 2,1 mm OD (nominal) Insulation dia. – 4,0/4,4 mm
HARDNESS :	Insulation hardness Shur 55 to 60
TEMPERATURE :	250 deg. C. max 220 deg. C. operating
CONDUCTOR RESISTANCE :	6,00/9,00 Kohms/metre at 20 deg. C
BREAKDOWN VOLTAGE :	15 kv (nom)
PACKAGING :	Plywood reels – 2000 m nominal quantity

1	UPDATE			15/03/05	Luigi Grillo
N	REVISION			DATE	SIGNATURE
DRAWING	CONTROLLER	APPROVED	DATE	SIGNATURE	
ABBATE	L. GRILLO	L. GRILLO	14-11-02		
	DESCRIPTION		SUPPLYER CODE	ARIA-CAB CODE	
	IGNITION CABLE 4mm 6/9kohm		I4KSOOBK	C70013	
ADRIA - CAB Srl				DATA SHEET	

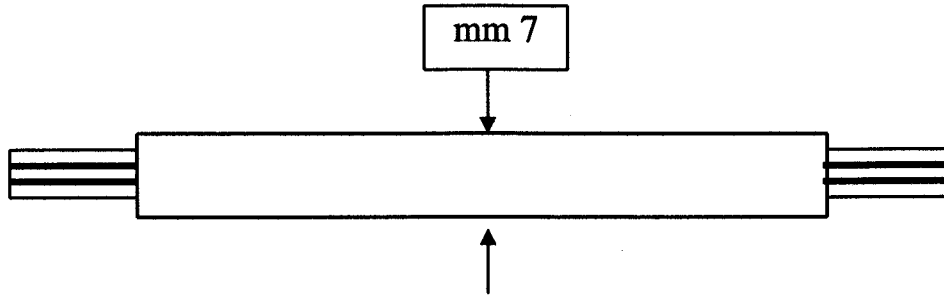

WIRE TYPE :	Supressed Silicone Ignition Cable Black- 7 mm dia.
CONSTRUCTION :	Conductor – Supressed resistite carbon core with conductive silicone rubber sheath Insulation – Hight temperature silicone rubber insulation
DIMENSION :	Conductor – 2,1 mm OD (nominal) Insulation dia. – 7,0/7,5 mm
HARDNESS :	Insulation hardness Shur 55 to 60
TEMPERATURE :	250 deg. C. max 220 deg. C. operating
CONDUCTOR RESISTANCE :	6,00/9,00 Kohms/metre at 20 deg. C
BREAKDOWN VOLTAGE :	30,3 kv (nom)
PACKAGING :	Plywood reels – 1000 m nominal quantity

1 update		REVISION		15-03-05	Luigi Grillo
N				DATE	SIGNATURE
DRAWING	CONTROLLER	APPROVED	DATE	SIGNATURE	
ABBATE	L. GRILLO	L. GRILLO	14-11-02		
DESCRIPTION			SUPPLYER CODE	ARIA-CAB CODE	
IGNITION CABLE 7mm 6/9 koh/m			I7KSOOBK	C70012	
ADRIA - CAB Srl				DATA SHEET	